


FEATURE FOCUS

MOTORIZED WELDING REEL



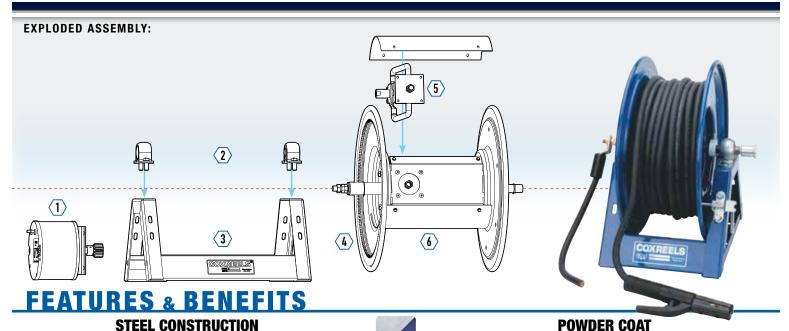

CHOICE OF MOTOR

High-Quality steel construction provides superior strength and durability for heavy-duty applications in commercial and industrial settings.

Customize reel to specific application:









oustornize roof to opcome application.		
Motor A	Air - #4 gast comp. air motor	8 lbs
Motor AB	Air - #6 gast comp. air motor	8 lbs
Motor E	Elec 12v DC 1/3 HP rew. rev. type	13 lbs
Motor EF	Elec 24v DC 1/3 HP rew. rev. type	13 lbs
Motor EB	Elec 24v DC 1/2 HP rew. rev. type	26 lbs
Motor ED	Elec Expl. prf 12v DC 1/2 HP rew. rev. type	26 lbs
Motor EA	Elec Expl. Prf 115v 1/2 HP rew., AC rev. type	26 lbs
Motor H	Hydraulic end ported 9/16-18 UNF rev.	6 lbs
Motor C	Front hand crank bevel geared crank	3 lbs



Pillow Block Bearings - Sturdy permanently lubricated and self-aligning pillow block bearings for smooth rotation and trouble-free operation.



"A" FRAME

Sturdy one piece, all CNC robotically welded 1/4" steel "A" frame base, not bolted, for superior reel structure.

Mounting Pattern - Mounting pattern located in the steel base for easy reel installation and detachment.



DIRECT DRIVE MOTOR

CPC™ Powder Coat. Long lasting, chip resistant and rust inhibiting CPC™ powder coat

finish seals all steel components for maximum corrosion resistance.

A solid steel halo is welded to the disc for a safe and reliable direct gear drive retraction on 1125 and 1275 Series.

- Lubricated chain and zinc plated steel sprocket on larger motorized 1175, 1185 and 1195 Series.



SLIP RING ASSEMBLY

Drum-located slip ring assembly with easy to access removable panel for simple routine maintenance.

- Electrical current runs through a heavy-duty 450 AMP rated slip ring.



CNC SPUN

Heavy duty CNC robotically spun and ribbed discs with rolled edges for greater strength, durability, hose protection and operator safety.











www.coxreels.com

800.COX.REEL P: 480.820.6396 F: 480.820.5132

E: info@coxreels.com