

Welding & FABRICATION

PROFESSIONAL GRADE FEATURES



ADJUSTABLE SOLID RUBBER HOSE STOP
for lead length positioning

VERSATILE GUIDE ARM adjusts to
wall, floor & overhead positions

SWIVEL LOCK BRACKET ensures maximum safety

EXTERNAL FLUID PATH DUAL PORTED BRASS SWIVEL
that screws directly on 1" solid steel axle, offering
both connections from the same side of the reel


HEAVY DUTY SPUN DISCS WITH ROLLED EDGES
- not stamped, for greater strength, made with
first of its kind CNC robotic spinning cell

HIGH QUALITY STEEL CONSTRUCTION
with our durable CPC™ powder coat finish

**ENCLOSED FACTORY TUNED AND MATCHED
CARTRIDGE-STYLE SPRING MOTOR**, easily
removed for safe & convenient replacement

**HEAVY GAUGE 1/4" STAINLESS STEEL BASE
& SUPPORT POST** for maximum stability

DUAL AXLE SUPPORT WITH SUPER HUB™ increased
reel strength for more demanding applications
On SH and T Series only

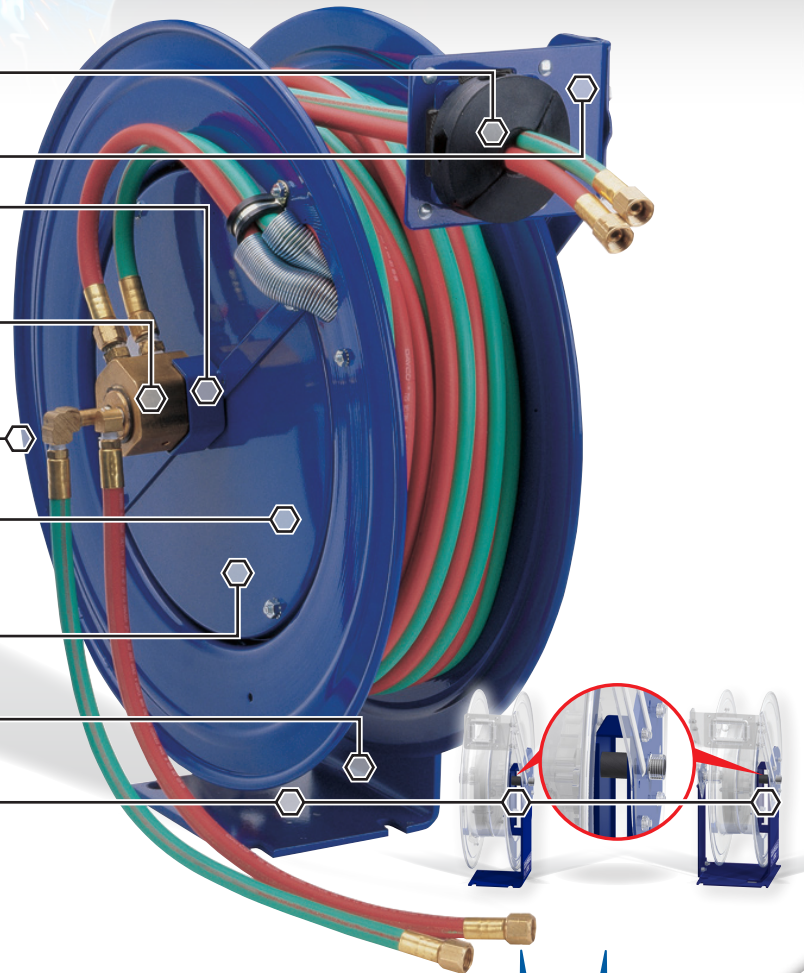

POSSIBLE FIELDS OF APPLICATION

- Oxygen-Acetylene Welding
- Welding / Service Truck
- Automotive/Fleet Maintenance
- Dual Fuel Welding
- Welding Shops
- Pipelines
- Arc Welding
- Garage Settings
- Mining/Construction & Railroad




www.coxreels.com

800.COX.REEL

P: 480.820.6396

F: 480.820.5132

E: info@coxreels.com



P-W & SHW SERIES

- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- Single pedestal reel with space saving design facilitates workplace organization
- Designed for Oxy-Acetylene or "T" grade welding hose


MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-W-125	EZ-P-W-125	1/4"	25	200	46	8 1/2 x 18 5/8 x 17"
SHW-N-150	EZ-SHW-150	1/4"	50	200	64	10 1/4 x 21 1/4 x 19 1/2"
SHW-N-160	-	1/4"	60	200	76	10 1/4 x 25 1/2 x 24"
SHW-N-1100	EZ-SHW-1100	1/4"	100	200	84	10 1/4 x 25 1/2 x 24"
P-WT-125	EZ-P-WT-125	1/4"	25	200	46	8 1/2 x 18 5/8 x 17"
SHWT-N-150	EZ-SHWT-150	1/4"	50	200	64	10 1/4 x 21 1/4 x 19 1/2"
SHWT-N-175	EZ-SHWT-175	1/4"	75	200	80	10 1/4 x 25 1/2 x 24"
SHWT-N-1100	EZ-SHWT-1100	1/4"	100	200	84	10 1/4 x 25 1/2 x 24"



SGW SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Side mount design for vertical flat surface, cabinet or enclosed space mounts.

MODEL	EZ-Coil® Safety Line	GAS	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SG17W-150	EZ-SG17W-150	Oxy/Act	1/4"	50	200	59	8 7/8 x 19 1/2 x 17"
SG19W-175	EZ-SG19W-175	Oxy/Act	1/4"	75	200	77	10 1/2 x 22 x 19 1/2"
SG17WT-150	EZ-SG17WT-150	T Grade	1/4"	50	200	59	8 7/8 x 19 1/2 x 17"
SG19WT-175	EZ-SG19WT-175	T Grade	1/4"	75	200	77	10 1/2 x 22 x 19 1/2"



100W SERIES

- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- Swivel Seals: VITON®
- Compact solid one piece, heavy gauge steel "U" shaped frame with open drum design

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
112W-1-50	1/4"	50	200	28	15 1/4 x 13 x 12"
112W-1-100	1/4"	100	200	37	18 3/4 x 13 x 12"
117W-1-200	1/4"	200	200	68	18 1/4 x 18 x 17"
112WT-1-50	1/4"	50	200	28	15 1/4 x 13 x 12"
112WT-1-100	1/4"	100	200	37	18 3/4 x 13 x 12"
117WT-1-200	1/4"	200	200	68	18 1/4 x 18 x 17"



1275W SERIES

- Two external fluid paths with machined from solid brass 90° full-flow 3/8" NPT swivel inlets (1 each side of the reel)
- Swivel Seals: VITON®
- All welded steel "A" frame construction for superior reel structure

MODEL	GAS	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1275W-3-100C	Oxy/Act	3/8"	100	200	73	18 7/8 x 18 5/8 x 17 5/8"
1275W-3-150C	Oxy/Act	3/8"	150	200	90	22 7/8 x 18 5/8 x 17 5/8"
1275W-3-250C	Oxy/Act	3/8"	250	200	126	28 7/8 x 18 5/8 x 17 5/8"
1275WT-3-100C	T Grade	3/8"	100	200	73	18 7/8 x 18 5/8 x 17 5/8"
1275WT-3-150-C	T Grade	3/8"	150	200	90	22 7/8 x 18 5/8 x 17 5/8"
1275WT-3-250C	T Grade	3/8"	250	200	126	28 7/8 x 18 5/8 x 17 5/8"



P-WC SERIES

- External, easily accessible heavy gauge CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Electrical current runs through a 450 AMP rated slip ring
- Designed for electrode & grounding lead applications (each lead requires an individual reel)
- Single pedestal reel with space saving design facilitates workplace organization

MODEL	FT.	TYPE	VOLT	AMPS.	APRX. LBS.	W x H x L
P-WC13-3506	35	6ga	600	75	31	8 1/2 x 14 1/2 x 13 3/4"
P-WC13-5006	50	6ga	600	75	35	8 1/2 x 14 1/2 x 13 3/4"
P-WC13-3504	35	4ga	600	150	34	8 1/2 x 14 1/2 x 13 3/4"
P-WC13-5004	50	4ga	600	150	39	8 1/2 x 14 1/2 x 13 3/4"
P-WC13-3502	35	2ga	600	225	36	8 1/2 x 14 1/2 x 13 3/4"
P-WC17-5002	50	2ga	600	225	56	11 x 18 1/4 x 17 1/4"
P-WC13-2501	25	1ga	600	300	35	8 1/2 x 14 1/2 x 13 3/4"
P-WC17-5001	50	1ga	600	300	60	11 x 18 1/4 x 17 1/4"
P-WC13-2510	25	1/0	600	350	37	8 1/2 x 14 1/2 x 13 3/4"
P-WC17-5010	50	1/0	600	350	64	11 x 18 1/4 x 17 1/4"
P-WC17-3520	35	2/0	600	450	60	11 x 18 1/4 x 17 1/4"
P-WC17-5020	50	2/0	600	450	68	11 x 18 1/4 x 17 1/4"



100WCL SERIES

- Drum-located slip ring assembly for simple routine maintenance
- Solid one piece, heavy gauge steel "U" shaped frame with open drum design
- Bronze self-lubricated spherical bearings at each end designed for heavy duty applications

MODEL	GAUGE	FT.	APRX. LBS.	W x H x L
112WCL-6-20	#2/0	100	19	18 x 13 x 12"
112WCL-6-10	#1/0	100	19	18 x 13 x 12"
112WCL-6-01	#1	150	19	18 x 13 x 12"
112WCL-6-02	#2	165	19	18 x 13 x 12"



1125WCL SERIES

- Drum-located slip ring assembly for simple routine maintenance
- All welded steel "A" frame construction to strengthen the reel structure
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation

MODEL	CABLE TYPE & CAPACITY				APRX. LBS.	W x H x L
	#2	#1	#1/0	#2/0		
1125WCL-6-C	300	250	200	150	38	18 3/4 x 18 1/2 x 17 1/2"
1125WCL-12-C	600	500	400	300	45	24 3/4 x 18 1/2 x 17 1/2"

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.