

NITRO-PRO® SERIES ALUMI-PRO® SERIES

COXREELS® Alumi-Pro® Series “Aluminum Professional-Grade” spring driven hose reels have the strength of steel without the weight! The Alumi-Pro® series is modeled after Coxreels’ popular P Series line of hose reels, but are uniquely constructed out of high quality aluminum. They’re compact, lightweight and non-corrosive making them the perfect choice when polypropylene or plastic hose reels are not the preferred choice due to their limited strength and durability.

ALUMI-PRO® SERIES

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D. mm	O.D. mm	LENGTH m	BAR	Kg.	MODEL	Kg.	
P-LP-125-AL	6	13	8	21	8	P-LPL-125-AL	7	1
P-LP-150-AL	6	13	15	21	11	P-LPL-150-AL	8	3
P-LP-325-AL	10	16	8	21	9	P-LPL-325-AL	7	2
P-LP-350-AL	10	16	15	21	12	P-LPL-350-AL	9	3
P-LP-425-AL	13	19	8	21	13	P-LPL-425-AL	10	4
P-LP-430-AL	13	19	9	21	14	P-LPL-430-AL	10	4

COXREELS® Nitro-Pro® Series spring driven hose reels are the only nitrogen hose reels specifically engineered, tested and approved for use with nitrogen tire inflation systems. These professional-grade specialty reels feature compact space-saving size and heavy duty construction for flexible installation and long-lasting performance. The EZ-Coil® model features Coxreels’ patented rewind safety system that retracts up to 80% slower than conventional spring driven reels. This reel is specifically designed to reduce workplace accidents and increase operator safety.

NITRO-PRO® SERIES

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D. mm	O.D. mm	LENGTH m	BAR	Kg.	AVAILABLE IN EZ-COIL	MODEL	Kg.	
P-NP-350	10	16	15	21	20	EZ-P-NP-350	P-NPL-350	16	3

To order EZ-Coil® equipped models less hose, please add prefix “EZ-”

REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W mm	H mm	L mm	X mm	Y mm	M mm	N mm
1	149	378	343	127	152	76	127
2	165	378	343	127	152	76	127
3	171	473	435	152	152	102	127
4	178	473	435	152	152	102	127

Overall Dimensions

Base

Mounting Pattern

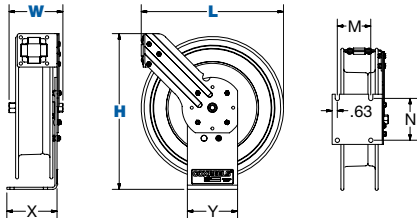

NITRO-PRO® & ALUMI-PRO® SERIES :: REEL SPECIFICATIONS

ALUMI-PRO® SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE

ALUMI-PRO® DESIGN / STRUCTURE

- Single pedestal reel for applications that require professional grade strength without the weight
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Industrial strength CPC™ powder coated aluminum construction
- 25 mm solid steel axle & lubricated precision bearings for smooth rotation

NITRO-PRO® SWIVEL

- Nitrogen quality seals in the machined from solid brass 90° full-flow NPT swivel

NITRO-PRO® DESIGN / STRUCTURE

- Designed for nitrogen tire inflation systems
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Solid one piece, heavy gauge 6 mm steel base & support post for maximum stability
- Durable special “Nitrogen Green” proprietary CPC™ powder coat finish
- Green nitrogen hose & hose stop to adjust lead length
- 25 mm solid steel axle & lubricated precision bearings for smooth rotation

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer’s limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Nitrogen Dispensing
- Tire Services
- Automotive Dealerships
- Automotive & Fleet Service Centers
- Service / Mechanic Trucks
- Air/Water Services
- Pneumatic Tools
- Chemical Fluid Transfer
- Lightweight Unit Requirements
- Service / Mechanic Trucks

ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories

